

**MAPLE ROAD TH 317B
BASE ADDITION AND PRIME COAT
SHEFFIELD, OHIO**

**TO PROSPECTIVE BIDDERS
JUNE 29, 2026
ADDENDUM NO. 1**

The attention of all prospective bidders for the subject project is directed to the following additions and modifications to the bidding documents:

MODIFICATIONS TO THE NOTICE TO BIDDERS :

The Quantity for Item 408 Cover Aggregate was in error.

Item 408 Cover Aggregate is 77 Cu. Yds.

Please replace Page 2 in the plans and the Proposal Sheet with the attached sheets.

Please email back to our office a signed copy of the Addendum acknowledgement form prior to the bid opening date. Email: sheffielddtwp.fo@gmail.com

**ACKNOWLEDGEMENT OF ADDENDUM NO. 1
MAPLE ROAD BASE ADDITION AND PRIME COAT
SHEFFIELD, OHIO**

Our office has received Addendum No. 1 and will include the changes in our Bid Proposal.


Company Name _____

Address _____

Signature _____

Title _____

Date _____

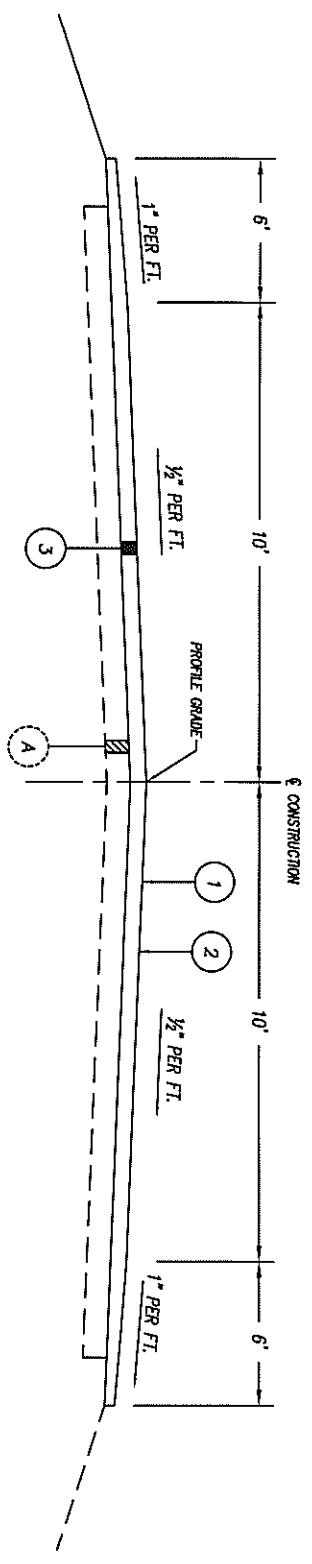

- LEGEND**
- ① ITEM 408 - PRIME COAT
 - ② ITEM 408 - COVER AGGREGATE
 - ③ ITEM 304 - 4" AGGREGATE BASE

Ⓐ EXISTING - BASE

CALCULATIONS

ITEM 408 PRIME COAT (6,855 X 20') = 137,100 SQ. FT.

ITEM 408 RADIUS AREAS 1,250 SQ. FT.

ITEM 408 DRIVE RESTORATION (43 DRIVES) SEE DETAIL = 200 SQ. FT.

ITEM 408 TOTAL 139,050 / 9 = 15,450 X .4 = 6,180 GAL.

ITEM 408 COVER AGGREGATE INCLUDING DRIVES 15,450 SQ. YDS. (12) = 185,400 LBS. / 2430 = 77 CU YDS.

ITEM 304 AGGREGATE BASE (6,855 X 20' X (4/12)) / 27 = 1,693 CU. YDS.

ITEM 304 AGGREGATE BASE TAPER (6,855 X 6' X (4/12)) / 27 = 508 CU. YDS.

ITEM 304 DRIVE RESTORATION (1,250 X (4/12)) / 27 = + 16 CU. YDS.


ITEM 304 DRIVE RESTORATION (43 (10' X 15' X (4/12)) / 27 = 80 CU. YDS.

ITEM 304 TOTAL 2,297 CU. YDS.

ITEM 202 PAVEMENT REMOVED (BY TOWNSHIP) (30 X 10) / 9 = 34 SQ YDS.

APPLIES DRIVE AT STA 67+47 LT.

NOTE: DRIVE RESTORATION TO BE 10' MINIMUM TO ALLOW SMOOTH TRANSITION FROM ROAD SURFACE. (AS DIRECTED BY ENGINEER)

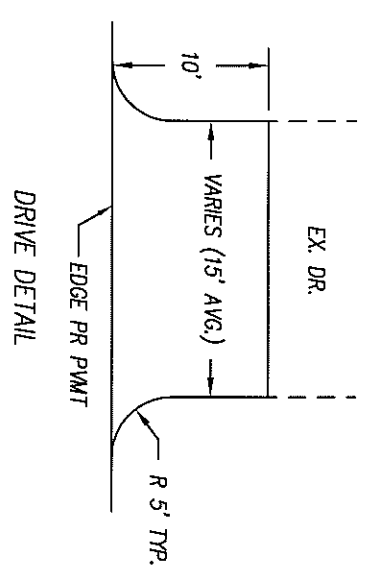

2	ASHTABULA COUNTY ENGINEERING DEPARTMENT	TYPICAL SECTION & CALCULATIONS	SCALE:	DRAWN: JNC
3	TIMOTHY T. MARTIN-COUNTY ENGINEER		DATE: 6/29/26	

PROPOSAL

COUNTY ENGINEERS DEPT.
ASHTABULA COUNTY

REPORT NO. _____

For Improving Road: Maple Road TH 317 B
In The Township Of: Sheffield
Improving By: base addition and prime coat

Pavement Width: 20'
Length In Feet, Miles: 1.3 miles 6855 feet (Griggs Rd North to Lillie Rd)

<u>Items</u>	<u>Quantities</u>	<u>DESCRIPTION</u>	<u>\$ Unit</u>	<u>\$ Total</u>
304	2297	4" Aggregate Base (Cu Yds)		
408	6180	Prime Coat (Gal)		
408	77	Cover aggregate(Cu Yds)		

TOTAL COST AND EXPENSE: \$ _____

Authorized Signature

Print name

Contractor: _____

Address: _____

Phone: _____

Name and email address for contract signee